

SOLUCIONES  
A PRUEBA DE  
**ROCA**

**LIUGONG**  
MÉXICO, CENTROAMÉRICA  
Y EL CARIBE

**DRESSTA**

**Model**  
**Capacity @ 500 mm LC**  
**Power Type**

CLGA18-T  
1,800 kg  
Electric

# CLGA18-T

ELECTRIC THREE WHEEL  
SOLID PNEUMATIC TIRE  
FORKLIFTS


**LIUGONG**



TOUGH WORLD. TOUGH EQUIPMENT.

# CLGA18-T SPECIFICATIONS >>>

<b>General</b>	<b>Model</b>	1			CLGA18-T	
	<b>Power Type</b>	2			Electric	
	<b>Base Capacity</b>	3	@ rated load center	kg	1800	
	<b>Load Center</b>	4		mm	500	
<b>Weights</b>	<b>Service Weight</b>	5	unloaded with minimum weight battery	kg	3450	
	<b>Axle Load</b>	6	loaded, front / rear	kg	4650/600	
		7	unloaded, front / rear	kg	1650/1800	
<b>Tires</b>	<b>Tire Type</b>	8			solid pneumatic	
	<b>Wheels</b>	9	front / rear		2/2	
	<b>Wheelbase</b>	10		mm	1390	
	<b>Tire Size</b>	11	front		200/50-10	
		12	rear		15x4.5-8	
<b>Mast</b>	<b>Tread Width</b>	13	front / rear	mm	925/180	
	<b>Max. Fork Height</b>	14	with std 2 - stage mast	mm	3300	
	<b>Freelift</b>	15	with std 2 - stage mast	mm	135	
	<b>Height, Upright Lowered</b>	16	with std 2 - stage mast	mm	2213	
	<b>Height, Upright Extended</b>	17	with std 2 - stage mast	mm	4380	
	<b>Mast Tilt, Fwd / Back</b>	18	with std 2 - stage mast	deg	6° / 7°	
	<b>Carriage</b>	19	width	mm	1040	
	<b>Fork Spread</b>	20	minimum / maximum	mm	222/1010	
	<b>Fork Dimensions</b>	21	T x W x L	mm	35 x 100 x 920	
	<b>Chassis</b>	<b>Length to Fork Face</b>	22	with std 2 - stage mast	mm	1965
		<b>Overall Width</b>	23		mm	1080
<b>Overhead Guard Height</b>		24		mm	2190	
<b>Turning Radius</b>		25	minimum outside	mm	1560	
<b>Fork Overhang</b>		26	with std 2 - stage mast	mm	425	
<b>Right Angle Stack</b>		27	add load length and clearance	mm	3237	
<b>Ground Clearance</b>		28	minimum loaded	mm	60	
		29	center of wheelbase	mm	98	
<b>Battery Compartment</b>		30	length / width / height	mm	630/830/627	
<b>Performance</b>		<b>Travel Speed</b>	31	loaded / unloaded	km/h	15/15
	<b>Lift Speed</b>	32	loaded / unloaded	m/s	0.4/0.45	
	<b>Lower Speed</b>	33	loaded / unloaded	m/s	0.5/0.4	
	<b>Max. Drawbar Pull</b>	34	5 min. rating	kg	1270	
		35	60 min. rating	kg	300	
	<b>Max. Gradeability</b>	36	5 min. rating	%	20	
<b>Systems</b>	<b>Controllers</b>	37	drive / hydraulic (make, type)		Inmotion,AC	
	<b>Motors</b>	38	drive output (60 min. rating)	kw	4.5x2	
		39	hydraulic output (15 min. rating)	kw	11	
	<b>Battery</b>	40	type		Lead	
		41	voltage		48	
		42	max. capacity (6 hour rating)	kwh	500	
		43	weight, minimum / maximum	kg	760/920	

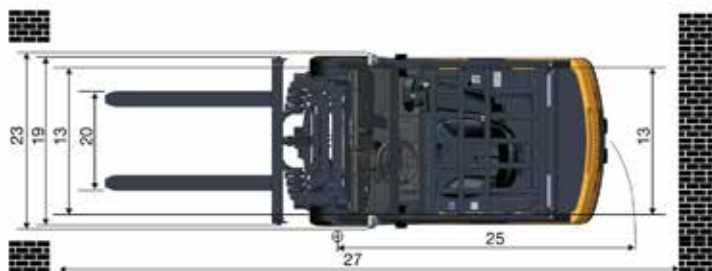

Las especificaciones y diseños están sujetos a cambios sin previo aviso. Las máquinas mostradas pueden incluir equipos estándar y opcionales.